


Montmirail "Light", DN80 portable monitor




Recommended outlet equipment
Ø 2.5"
 Flow rate
4000 lpm

Maximum working pressure: PN16
Material: aluminium alloy
Body type: moulded
Shutoff: ball valve
Opening: by lever
Vertical movement: from +35° to +85°
Vertical adjustment: by handle
Horizontal movement: from -25° to +25°
Horizontal adjustment: by handle
Safety: locking of the legs, anchoring strap, shutoff, horizontal and vertical locking device
Carrying handle: YES
Foldable legs: YES


Options: couplings, outlet equipment, siamese.



Open/close valve with locking knob



Locking knob for vertical position, and locking pin for fold away legs

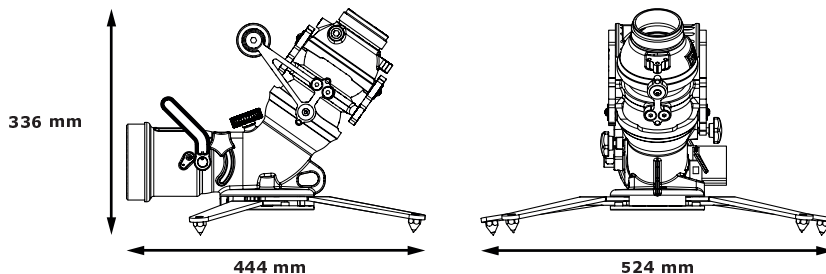

The "Montmirail Light" weighs less than 12 Kg with diffuser and collecting device, and is the lightest equipment of its kind on the market.

This monitor offers all the features of the latest generation: PN16, vertical positioning between +35° to +85°.

It comes with an open/closed valve and stabilising legs.

It can be equipped with different outlet equipment or couplings.



Inlet	Outlet	Waterway Ø (mm)	Dimensions (mm)	Weight (kg)	Ref
4" BSP male	2.5" NST-NH male	80	444 x 524 x 336	6,39	34646